

50 SERIES PNEUMATIC CASTERS




FEATURES

- "Cold froged" top plate upper and lower Raceways
- Double row ball bearing swivel raceway construction for extra strength.
- Hardened Raceways.
- Zerk fitting in swivel race for lubrication.
- Finish: All parts except wheel are zinc plated for corrosion resistance.
- Legs are formed and welded to upper raceway for increased strength
- These are available with Black or Grey Non-Marking Tread wheel.

APPLICATIONS:

- Cargo containers, food handling equipment, etc.

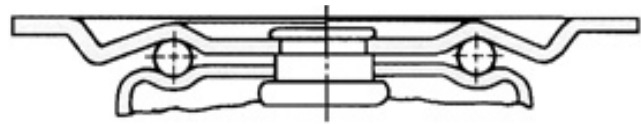

FASTENING SPECIFICATIONS FOR 50 SERIES

FASTENING TYPE	FASTENING SHAPE	CODE	SPECIFICATION		
			OVERALL	BOLT HOLE SPACING	ATTACHING BOLT SIZE
Top Plate		01	4 x 4 1/2	2-5/8 x 3-5/8 to 3/3	3/8
		02	4 1/2 x 6-1/4	2-7/16 x 4-15/16 to 3-3/8 x 5-1/4	1/2
		03	5 x 5-1/2	4 x 4-1/8	1/2

SPECIFICATIONS FOR 50 SERIES

CASTER PART NUMBER		WHEEL SPECIFICATION					CASTER SPECIFICATION		
SWIVEL	RIGID	DIAMETER	HREAD WIDTH	TYPE	BEARING	AXLE DIA	OVERALL HEIGHT	SWIVEL RADIUS	LOAD CAPACITY
850-22B	851-22BR	8	2-1/2	Pneumatic	Ball	1/2	11	6-5/8	350
1050-22B	1051-22B	10	3-1/2	Pneumatic	Ball	1/2	13	6-1/4	470

ACCESSORIES OPTIONS FOR 50 SERIES

ACCESSORIES CODE	DESCRIPTION
VLB	Verti-Lock Brake

Add selected code or codes to the end of part number.