


# HR - HARD RUBBER WHEELS

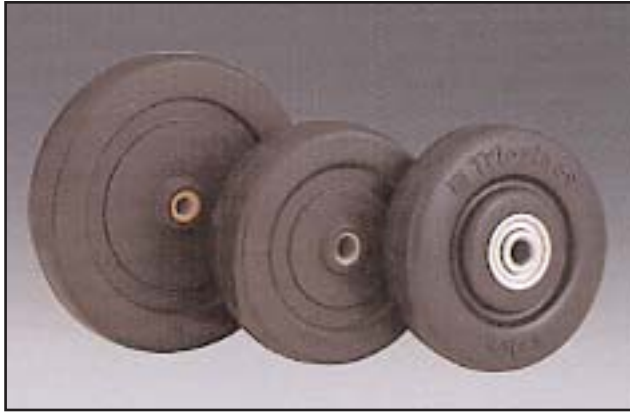

## CAPACITY TO 300 LBS.

- Made of high impact molded hard rubber composition
- Higher load rating than soft rubber
- Good mobility and durability
- Will not flat spot under static loads
- Tread durometer is 75 +/-5 (SHORE D)

### SPECIFICATIONS

WHEEL DIAMETER	WHEEL WIDTH	WHEEL COMPOSITION	BEARING TYPE	LOAD CAPACITY	BEARING BORE	HUB LENGTH	PART NUMBER
2	13/16	Hard Rubber	Nylon	65	1/4	7/8	HR-222
	1		Nylon	90	1/4	1 1/16	HR-212
2 1/2	13/16	Hard Rubber	Nylon	75	15/64	7/8	HR-2510
	1 1/8		Nylon	100	5/16	1 3/8	HR-252P
3	15/16	Hard Rubber	Nylon	100	1/4	1	HR-312
	13/16		Nylon	100	1/4	7/8	HR-310
	1		Nylon	100	5/16	1 5/32	HR-314
	1 1/4		Nylon	125	5/16	1 7/16	HR-331
	1 1/4		Nylon	125	3/8	1 7/16	HR-330
	1 1/4		Nylon	125	3/8	1 9/16	HR-325
	1 1/4		Ball	125	5 1/6	1 5/8	HR-331
	1 1/4		Ball	125	3/8	1 5/8	HR-330
3 1/2	1 1/4	Hard Rubber	Nylon	140	5/16	1 7/16	HR-3531
			Nylon	140	3/8	1 7/16	HR-3530
4	1	Hard Rubber	Nylon	125	5/16	1 5/32	HR-412
	1		Ball	125	5/16	1 5/32	HRB-412
	1 1/4		Nylon	165	5/16	1 7/16	HR-431
	1 1/4		Nylon	165	3/8	1 7/16	HR-430
	1 1/4		Nylon	165	3/8	1 9/16	HR-425
	1 1/4		Ball	165	5/16	1 5/8	HRB-431
	1 1/4		Ball	165	3/8	1 5/8	HRB-430
	1 1/4		Nylon	165	1/2	1 9/16	HR-432
	1 1/4		Nylon	165	7/16	1 15/16	HR-420
5	1	Hard Rubber	Nylon	125	5/16	1 5/32	HR-512
	1		Ball	125	5/16	1 5/32	HRB-512
	1 1/4		Nylon	175	5/16	1 7/16	HR-531
	1 1/4		Nylon	175	3/8	1 7/16	HR-530
	1 1/4		Nylon	175	3/8	1 9/16	HR-525
	1 1/4		Ball	175	5/16	1 5/8	HRB-531
	1 1/4		Ball	175	3/8	1 5/8	HRB-530