


PC - POLYURETHANE MOLD-ON CAST IRON WHEELS

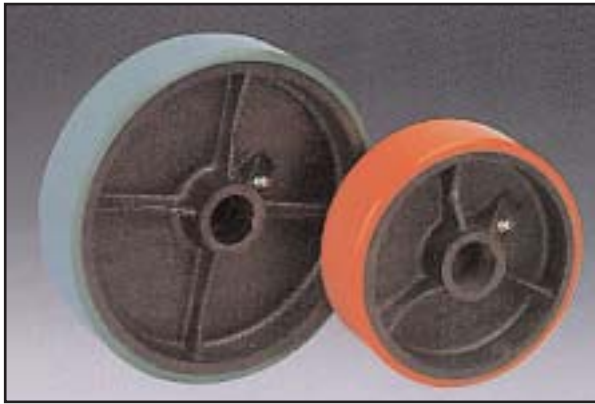

CAPACITY TO 3200 LBS.

- Resistant to most chemicals, oil, acids, grease and water.
- Cushion ride absorbs shocks.
- Our last rubber 5 to 1
- Will not develop permanent flast spots in tread.
- Cast iron center provides extra strength.
- Roller bearing for easy maneuverability.
- Durometer: 85-95 (SHORE A)

SPECIFICATIONS

WHEEL DIAMETER	WHEEL WIDTH	WHEEL COMPOSITION	BEARING TYPE	LOAD CAPACITY	BEARING BORE	HUB LENGTH	PART NUMBER
4	2	Polyurethane/Cast Iron	Roller	800	3/4	2 3/16	PCR-420
5	2	Polyurethane/Cast Iron	Roller	1000	3/4	2 3/16	PCR-520
6	2	Polyurethane/Cast Iron	Roller	1200	3/4	2 3/16	PCR-620
	2 1/2		Roller	1600	1	2 3/4	PCR-625
	3		Roller	2000	1	3 1/4	PCR-630
8	2	Polyurethane/Cast Iron	Roller	1400	3/4	2 3/16	PCR-820
	2 1/2		Roller	1900	1	2 3/4	PCR-825
	3		Roller	2500	1	3 1/4	PCR-830
10	2 1/2	Polyurethane/Cast Iron	Roller	2200	1	2 3/4	PCR-1025
	3		Roller	3000	1	3 1/4	PCR-1030
12	2 1/2	Polyurethane/Cast Iron	Roller	2500	1	2 3/4	PCR-1225
	3		Roller	3200	1	3 1/4	PCR-1230

Delrin Bearings or Plain Bore Wheel Available