


# PH - PHENOLIC WHEELS

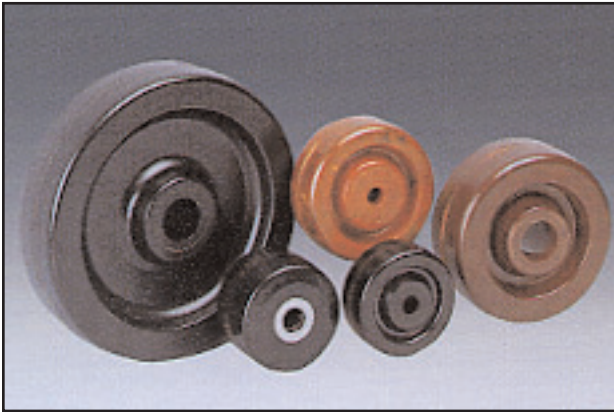

## CAPACITY TO 3000 LBS.

- Phenolic resin and macetated fabric combined to resist hard impacts.
- Provides superior floor protection.
- Quieter operation than steel with comparable capacity.
- Resistant to oils and gasoline.
- High-Temperature compositions available.  
(Call for information).
- Roller bearings provide consistent, smooth rolling.

## SPECIFICATIONS

WHEEL DIAMETER	WHEEL WIDTH	WHEEL COMPOSITION	BEARING TYPE	LOAD CAPACITY	BEARING BORE	HUB LENGTH	PART NUMBER
4	1 1/2	Phenolic	Roller	600	5/8	1 11/16	PHR-415
	2		Roller	800	3/4	2 3/16	PHR-420
5	1 1/2	Phenolic	Roller	600	5/8	1 11/16	PHR-515
	2		Roller	1000	3/4	2 3/16	PHR-520
6	1 1/2	Phenolic	Roller	800	5/8	1 11/16	PHR-615
	2		Roller	1200	3/4	2 3/16	PHR-620
	2 1/2		Roller	1600	1	2 3/4	PHR-625
	3		Roller	2000	1	3 1/4	PHR-630
8	2	Phenolic	Roller	1400	3/4	2 3/16	PHR-820
	2 1/2		Roller	2000	1	2 3/4	PHR-825
	3		Roller	2500	1	3	PHR-830
10	2 1/2	Phenolic	Roller	2500	1	2 3/16	PHR-1025
	3		Roller	2900	1	2 3/4	PHR-1030
12	2 1/2	Phenolic	Roller	3000	1	2 3/4	PHR-1225
	3		Roller	3000	1	3 1/4	PHR-1230

*Delrin Bearings or Plain Bore Wheels Available*