


POLYURETHANE ON POLYOLEFIN CENTER MECHANICALLY BONDED TREAD

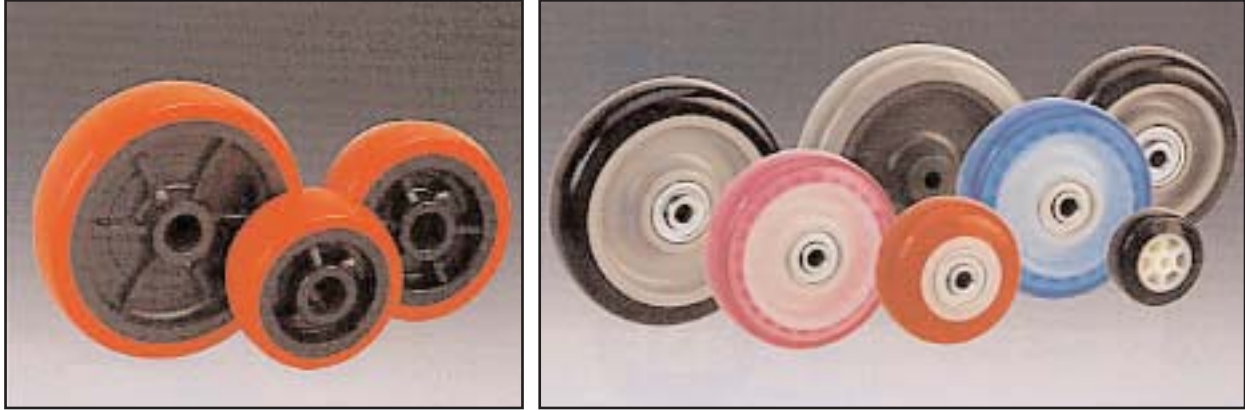

CAPACITY TO 900 LBS.

- Resistant to most chemicals, oil, acids, grease and water
- Cushion ride absorbs shocks
- Tread mechanically bonded to core making this wheel virtually indestructible
- Will not develop permanent flat spots in tread
- When equip with delrin bearing wheel has no metal parts to rust
- Perfect for equipment that is washed frequently
- Durometer: 85-95 (Shore A)

SPECIFICATIONS

WHEEL DIAMETER	WHEEL WIDTH	WHEEL COMPOSITION	BEARING TYPE	LOAD CAPACITY	BEARING BORE	HUB LENGTH	PART NUMBER
2	13/16	Polyurethane/Plastic	Plain	90	5/16	7/8	PUP-210
	15/16		Plain	90	1/4	1	PUP-211
3	1 1/4	Polyurethane/Plastic	Ball	220	3/8	1 5/8	PUB-311
	1 1/4		Plain	210	3/8	1 9/16	PUB-314
4	1 1/4	Polyurethane/Plastic	Ball	230	5/16	1 5/8	PUB-41
	1 1/4		Ball	230	3/8	1 5/8	PUB-414
	2		Roller	700	3/4	1 5/8	PUR-420
	2		Delrin	700	3/4	2 3/16	PUD-420
5	1 1/4	Polyurethane/Plastic	Ball	250	5/16	2 3/16	PUB-510
	1 1/4		Ball	250	3/8	1 5/8	PUB-514
	2		Roller	770	3/4	2 3/16	PUR-520
	2		Delrin	770	3/4	2 3/16	PUD-520
6	2	Polyurethane/Plastic	Roller	900	3/4	2 3/16	PUR-620
	2		Delrin	900	3/4	2 3/16	PUD-620
8	2	Polyurethane/Plastic	Roller	970	3/4	2 3/16	PUR-820
	2		Delrin	970	3/4	2 3/16	PUD-820